




REMOTE DIAL THERMOMETER



Dimensions(in.)

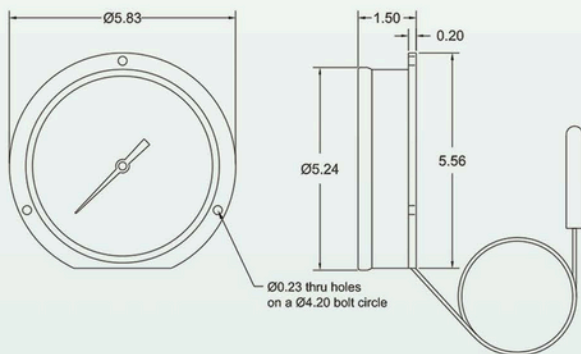

General Specifications

CASE: 300 series stainless steel.

RING: 300 series stainless steel, threaded.

LENS: Tempered Glass.

DIAL: Aluminum with white finish and black markings.

POINTER: Black, adjustable.

MOVEMENT: Brass with precision gearing.

BOURDON TUBE: Phosphor bronze.

ACCURACY: \pm One scale division.

TUBESYSTEM:

CAPILLARY TUBING: 60" tin-plated copper (std.).

CONNECTION: Plain.

SENSING BULB: Nickel-plated copper bulb, \varnothing 7/16".

Other tube systems and capillary lengths available - see page 62.

AMBIENT TEMPERATURE: -40 to 200°F (-40 to 93°C).

ValveLink Europe Ent

ValveLink
All your process control needs