

Ultrasonic flow meter


INTRODUCTION:

Ultrasonic flowmeter measures the flow of liquid in the tube. Ultrasonic flow meters are accurate in measurement, reliable in operation, and more suitable for industrial sites. The converter forms are: handheld, portable, wall-mounted, modular, the sensor forms are: plug-in, inline, and clamping.



1. Handheld ultrasonic flow meter

The hand-held ultrasonic flowmeter realizes the non-contact measurement of the liquid flow. The sensor is installed on the outer wall of the pipeline to complete the flow measurement. It has the characteristics of small size, convenient carrying and accurate measurement.

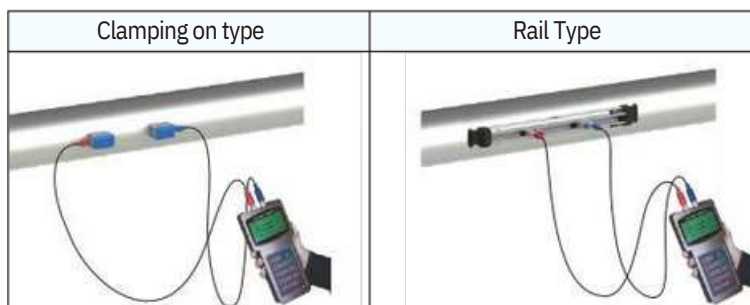

TRANSDUCERS USED FOR DIFFERENT PIPE SIZE:

Types	Picture	Size	Model	Measuring range	Temperature
Standard		Small	TS-2	DN15~DN100	-30~90°C
		Medium	TM-1	DN50 ~DN700	-30~90°C
		Large	TL-1	DN300~DN6000	-30~90°C
High Temp		Small	TS-2-HT	DN15~DN100	-30~160°C
		Medium	TM-1-HT	DN50 ~DN700	-30~160°C
		Large	TL-1-HT	DN300~DN6000	-30~160°C
Rail type		Small	HS	DN15~DN100	-30~90°C
		Medium	HM	DN50~DN300	-30 ~90°C
		Large	EB-1	DN300~DN700	-30~90°C
Rail type with high temp		Small	HS-HT	DN15~DN100	-30~160°C
		Medium	HM-HT	DN50~DN300	-30 ~160°C
		Large	EB-1-HT	DN300~DN700	-30~160°C

Aluminum carrying case

Connector of flow sensor

LED display
Support Chinese English, france and Italy

Battery charging Signal Output / Signal input

Built-in 32K memory

The built-in 32K memory can store up to 2000 lines of measurement data. the measurement data can be processed, including data analysis, report printing, flow curve making and other functions.

STANDARD DELIVERY:

1 x Handheld Ultrasonic Flowmeter	1 x Integrated datalogger	1 x Battery 1 + Charger
2 x3 Types Transducer (with rail if ordered)	1 x RS232 interface	1 x House of protection
2 x 5 m connection cable	1 x Pulse output	1 x tape measure
1 x 2GB SD card (optional)	2 x Fastening chains	1 x Heavy duty aluminum carrying case
		1 x Instructions manual


SPECIFICATION:

	Handheld ultrasonic flow meter	Handheld ultrasonic energy meter
Accuracy	± 1%	± 2%
Tube diameter	DN15-DN6000	
Flow rate	0-±10m/s	
Turbidity	10000ppm, and the bubble content is small	
Medium Tep	-30-160°C	
Applicable pipes	Steel, stainless steel, copper, PVC, aluminum, fiberglass and other pipes. Lining is allowed.	
Signal Output Signal input	1 way OCT Output (pulse width 6-1000ms, default 200ms)	1 way 4~20mA output 1 way OCT output 1 circuit relay output 3 way 4~20mA input 2 way temperature messure
Data interface	RS232	RS485
Communication protocol	MODBUS,M-BUS,HART,ETC	
Display	LCD display	
Keyboard	16+2 Touch keyboard	
Data record	Built in 32MB memory	Thermal printerExternal SD card
Power supply	Rechargeable NI-MH batteries 2000mAH	
Work time	More than 12h	More than 20h

2.Portable ultrasonic flowmeter

INTRODUCTION:

Portable ultrasonic flowmeter realizes the non-contact measurement of the liquid flow. The sensor is installed on the outer wall of the pipeline to complete the flow measurement. Convenient and accurate, built-in printer and SD card memory, can print the set measurement value instantly or regularly.

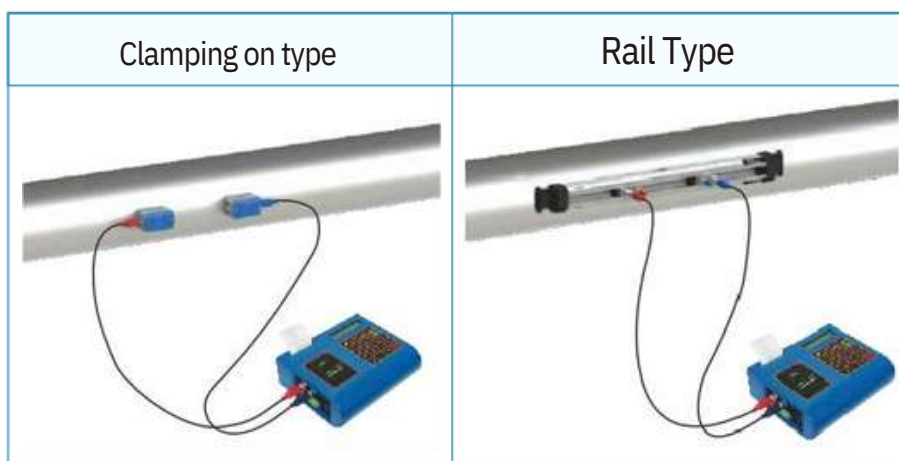

TRANSDUCERS USED FOR DIFFERENT PIPE SIZE:

Types	Picture	Size	Model	Measuring range	Temperature
Standard		Small	TS-2	DN15~DN100	-30~90°C
		Medium	TM-1	DN50 ~DN700	-30~90°C
		Large	TL-1	DN300~DN6000	-30~90°C
High Temp		Small	TS-2-HT	DN15~DN100	-30~160°C
		Medium	TM-1-HT	DN50 ~DN700	-30~160°C
		Large	TL-1-HT	DN300~DN6000	-30~160°C
Rail type		Small	HS	DN15~DN100	-30~90°C
		Medium	HM	DN50~DN300	-30 ~90°C
		Large	EB-1	DN300~DN700	-30~90°C
Rail type with high temp		Small	HS-HT	DN15~DN100	-30~160°C
		Medium	HM-HT	DN50~DN300	-30 ~160°C
		Large	EB-1-HT	DN300~DN700	-30~160°C

SPARE PARTS:



Printer



LED display

Support Chinese English, france and Italy

Connection

Signal Output:4-20mA

Signal input :4-20mA

Communication:RS485



SD card data memory

SPECIFICATION:

Category	Portable ultrasonic flowmeter
Accuracy	flow $\pm 1\%$, heat $\pm 2\%$
Tube diameter	DN15-DN6000
Flow rate	0- ± 10 m/s
Measuring medium temperature	-30-160°C
Turbidity	10000ppm, and the bubble content is small
Applicable pipes	Steel, stainless steel, copper, PVC, aluminum, fiberglass and other pipes. Lining is allowed.
Signal Output	1 way 4~20mA output
Signal input	1 way OCT output
	1 circuit relay output
	3 way 4~20mA input
	2 way temperature measure
Data interface	RS485
Communication protocol	MODBUS,M-BUS,HART,ETC
Display	LCD display
Keyboard	16+2 Touch keyboard
Data record	Thermal printer External SD card
Power supply	Rechargeable NI-MH batteries 2000mAH

STANDARD DELIVERY :

- ✓ 1 x portable Ultrasonic Flowmeter
- ✓ 2 x 3Types Transducer (with rail if ordered)
- ✓ 2 x 5m connection cable
- ✓ 1 x SD card
- ✓ 1 x Integrated datalogger
- ✓ 1 x RS232 interface
- ✓ 1 x Pulse output
- ✓ 2 x Fastening chains
- ✓ 1 x Battery 1 + Charger
- ✓ 1 x House of protection
- ✓ 1 x tape measure
- ✓ 1 x Heavy duty aluminum carrying case
- ✓ 1 x Instructions manual



Rail Type



Clamping on type

3.Wall Mounted Ultrasonic Flowmeter

INTRODUCTION:

Wall Mounted Clamp-on Ultrasonic Flowmeter can be installed on the wall, instrument box, distribution box, and the protection level of the host reaches IP67.Wall-mounted ultrasonic flowmeter compatible with nearly all material pipe with diameter 15mm~6000mm,such as Stainless steel pipe,PVC pipe,aluminum pipe,galvanized pipe,steel pipe,etc.



PARAMETERS:

Flow range	0-12m/s
Applicable caliber	DN15~DN6000
Display	2*20 backlit LCD(Chinese and English optional)
Power supply mode	220VAC/8~36VDC
Power consumption	Operating current is 50mA
Accuracy	± 1%
Operating	4*4 tactile keypad
Protection level	Mainframe:IP65, transducer:IP:68
Communication	RS485 Modbus RTU Interface
Output	1x 4-20 mA ~ 1x impulsion ~ 1x relay
Inputs	3x 4-20 mA, qccuracy 0.1 % (acquisition of temperature, pressure)

INSTALLATION:



TYPES OF FLOW TRANSDUCERS:

Flow transducer	Model	Measuring range	Temperature
Clamp on	TS-2(small)	DN25-DN100	-30°C~90°C
	TM-1(medium)	DN50-DN700	
	TL-1(large)	DN300-DN6000	
High temp Clamp on	TS-2-HT(small)	DN25-DN100	-30°C~160°C
	TM-1-HT(medium)	DN50-DN700	
	TL-1-HT(large)	DN300-DN6000	
Insertion	TC-1(standard)	DN50-DN6000	-30°C~160°C
	TC-2(extended)		
	TP-1(parallel)	DN80-DN6000	
Inline	standard	DN15-DN1000	-30°C~160°C

4.Modular clamp-on ultrasonic flowmeter

INTRODUCTION:

The flow meter is small in size, full of functions, and low in price. It is installed on a guide rail and is suitable for batch use and installation in an instrument box or power distribution cabinet.



Flow range	0-12m/s
Applicable caliber	DN15~DN6000
Display	2*20 backlit LCD(Chinese and English optional)
Power supply mode	220VAC/8~36VDC
Power consumption	Operating current is 50mA
Accuracy	± 1%
Protection level	Mainframe:IP65, transducer:IP68
Communication	RS485 Modbus RTU Interface
Output	1x 4-20 mA ~ 1x impulsion ~ 1x relay
Inputs	3x 4-20 mA, qccuracy 0.1 % (acquisition of temperature, pressure)

INSTALLATION:



TYPES OF FLOW TRANSDUCERS:

Flow transducer	Model	Measuring range	Temperature
Clamp on	TS-2(small)	DN25-DN100	-30°C~90°C
	TM-1(medium)	DN50-DN700	
	TL-1(large)	DN300-DN6000	
High temp Clamp on	TS-2-HT(small)	DN25-DN100	-30°C~160°C
	TM-1-HT(medium)	DN50-DN700	
	TL-1-HT(large)	DN300-DN6000	
Insertion	TC-1(standard)	DN50-DN6000	-30°C~160°C
	TC-2(extended)		
	TP-1(parallel)	DN80-DN6000	
Inline	standard	DN15-DN1000	-30°C~160°C

5.Fixed Mounting ultrasonic flow meter

Fixed Mounting ultrasonic flow meter can be installed on the pipe line, the sensor can be installed clamp on, insertion and Inline.



PARAMETERS:

Flow range	0-12m/s
Applicable caliber	DN15~DN6000
Display	2*20 backlit LCD(Chinese and English optional)
Power supply mode	220VAC/8~36VDC
Power consumption	Operating current is 50mA
Accuracy	± 1%
Protection level	Mainframe:IP65, transducer:IP68
Communication	RS485 Modbus RTU Interface
Output	1x 4-20 mA ~ 1x impulsion ~ 1x relay
Inputs	3x 4-20 mA, qccuracy 0.1 % (acquisition of temperature, pressure)

TYPES OF FLOW TRANSDUCERS:

Flow transducer	Model	Measuring range	Temperature
Clamp on	TS-2(small)	DN25-DN100	-30°C~90°C
	TM-1(medium)	DN50-DN700	
	TL-1(large)	DN300-DN6000	
High temp Clamp on	TS-2-HT(small)	DN25-DN100	-30°C~160°C
	TM-1-HT(medium)	DN50-DN700	
	TL-1-HT(large)	DN300-DN6000	
Insertion	TC-1(standard)	DN50-DN6000	-30°C~160°C
	TC-2(extended)		
	TP-1(parallel)	DN80-DN6000	
Inline	standard	DN15-DN1000	-30°C~160°C

