


**Y-Strainer**

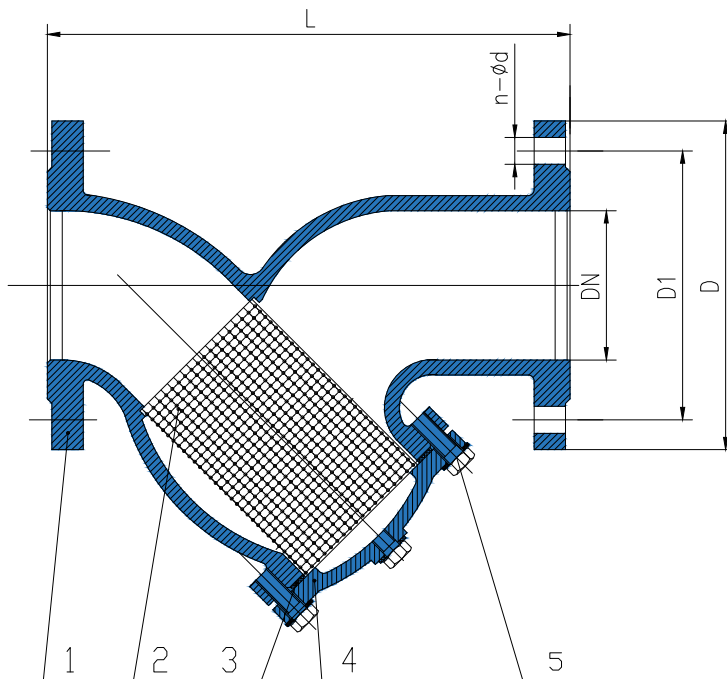

- **Type:**  
Flange
- **Face to Face:**  
API609,BS5155,DIN3202,IS05752
- **Flange:**  
DIN,BS,UNI,ISO, ANSI, AS,JIS
- **Mounting Flange:**  
ISO5211
- **Working Pressure:**  
PN16(200PSI)
- **Appliaction:**  
HVAC,Water Supply&Sewage,  
Food&Beverage,Chemical/  
petrochemical/processing,  
Power and Utilities,Paper  
and Pulp,Ship Building.

**STANDARD MATERIALS OF MAIN PARTS**

ITEM	PART NAME	MATERIAL
1	BOLT	CS
2	BONNET	DI
3	SEATING	RUBBER
4	SCREEN	Ss304
5	BODY	DI

**DIMENSIONS:(mm)**

DN	F1	DIN PN16			DIN PN10		
	L	D	D1	n-Ød	D	D1	n-Ød
50	230	165	125	4-19	165	125	4-19
65	290	185	145	4-19	185	145	4-19
80	310	200	160	8-19	200	160	8-19
100	350	220	180	8-19	220	180	8-19
125	400	250	210	8-19	250	210	8-19
150	480	285	240	8-23	285	240	8-23
200	600	340	295	12-23	340	295	8-23
250	730	405	355	12-28	395	350	12-23
300	850	460	410	12-28	445	400	12-23
350	980	520	470	16-28	505	460	16-23
400	1100	580	525	16-31	565	515	16-28
450	1200	640	585	20-31	615	565	20-28
500	1250	715	650	20-34	670	620	20-28